

669456

WOODS HOLE OCEANOGRAPHIC INSTITUTION  
Woods Hole, Massachusetts

REFERENCE NO. 68-31

MOORING MOTION

by

N. P. Fofonoff and John Garrett

May 1968

TECHNICAL REPORT

*Submitted to the Office of Naval Research  
under Contract Nos. Nonr-3351(00) NR 063-501  
and Nonr-2196(00) NR 083-004.*

*Reproduction in whole or in part is permitted  
for any purpose of the United States Govern-  
ment. In citing this manuscript in a bibliog-  
raphy, the reference should be followed by the  
phrase: UNPUBLISHED MANUSCRIPT.*

*This document has been approved for public  
release and sale; its distribution is unlimited.*

Approved for Distribution

N. P. Fofonoff

N. P. Fofonoff, Chairman  
Department of Physical Oceanography

## Mooring Motion

N.P. Fofonoff and John Garrett<sup>1</sup>  
Woods Hole Oceanographic Institution

### Introduction:

Mooring motion is the change in the equilibrium position of a moored buoy in response to a change in the direction and speed of the current flowing past the mooring. The motion has a maximum amplitude near the surface and decreases to zero at the bottom. Current measurements are made relative to the mooring so that mooring motion is present as an extraneous signal in the measurements.

The motion is particularly pronounced if the current contains a rotary component exceeding the mean current. The mooring is swept through an irregular orbit with the frequency of the rotary component at speeds that may attain a significant fraction of the measured speeds. Because the mooring tends to move with the current, the amplitude of the rotary component can be considerably attenuated in the relative flow past the mooring. Furthermore, the measured currents at depth can be contaminated with spurious indications of rotary flow by the motion. Because the displacement of a mooring is approximately proportional to the horizontal drag - a nonlinear function of speed - harmonics and intermodulation frequencies are generated in the recorded velocities.

As the presence of mooring motion degrades the quality of the measured currents, the magnitude of the motion has to be estimated to determine the conditions under which it is not negligible. A knowledge of the mechanics of the motion can also provide techniques for minimizing its effects in the measured currents.

Although it is possible to estimate numerically the motion for a given mooring configuration and current profile, the difficulty of specifying the profile continuously in time from measurements at discrete depths and the uncertainty of drag calculations make it desirable to obtain an independent measure of the motion to evaluate the numerical model. It was decided to conduct mooring motion experiments at sea. In November, 1963, a preliminary attempt to detect the motion was conducted from Bermuda using two tracking azimuth telescopes on a three-mile baseline. The telescopes are located about 200 feet above sea level and eight-foot toroidal surface floats could be seen up to 17 miles away under the best conditions. The trial indicated that the floats could be tracked easily during darkness and throughout most of the daylight hours. Tracking was difficult during daylight when the flashing beacons on the floats could not be seen. A slight haze was sufficient to obliterate the buoy from view at 10 miles.

---

<sup>1</sup>Institute of Oceanography, University of British Columbia, Vancouver, B.C., Canada

A more extensive series of measurements were carried out in May, 1964 over a period of one week (Table 1). Two surface floats were tracked for six days. The moorings were instrumented to measure surface wind, currents and cable tension. In addition, three moorings with subsurface floats were set during the same period to measure spatial variation of the velocity field.

The data collected fell short of expectations because of losses to "fishbite" and instrument malfunction so that some of the planned objectives were not attained. However, sufficient measurements were collected to describe several significant aspects of mooring motion.

### A Simple Theoretical Model

In deep water, the major contribution to the horizontal drag on a mooring occurs in the upper 10 to 20% of the water column where currents are usually strongest. To a first approximation, the horizontal drag can be represented by a lumped force acting on the mooring float itself. Actually most of the drag is contributed by the upper section of the mooring cable but the motion is not changed significantly in character by assuming the drag force to be concentrated at the float. The resultant simplification of the mooring motion equations makes this assumption extremely useful as a starting point in the analysis. The model can be generalized without difficulty to a multi-level model corresponding to the number of current meters suspended on the mooring. The advantage of the single-level model is that several explicit analytical solutions can be obtained to develop a familiarity with the response characteristics of the mooring.

The drag force  $F$  acting on the cross section  $A$  of the mooring is estimated from the empirical drag law

$$F = 1/2 \rho C_D A v^2$$

where  $\rho$  is water density ( $1 \text{ gm/cm}^3$ ),  $C_D$  drag coefficient and  $v$  the horizontal speed of flow past the mooring. For explicit calculations, the cross sectional area is calculated from the upper third of the mooring.

For a mooring of length  $L$  and cable tension  $T$ , the restoring force for small displacements  $r$  is given by

$$Tr/L \text{ for } r \ll L$$

In equilibrium, the restoring force must equal the drag force so that

$$Tr/L = 1/2 \rho C_D A v^2$$

or

$$r = \frac{1/2 \rho C_D A L}{T} v^2 = K v^2$$

where  $K = 1/2 \rho C_D A L / T$  is a measure of mooring compliance. The

displacement is in the direction of the current.

In a changing current, the drag is a function of the relative speed between the mooring and the water, so that the displacement is in the direction of the relative current. It is assumed that the inertia of the mooring is negligible so that equilibrium between the drag and restoring forces holds at all times.

If the float position with respect to a horizontal coordinate system is given by  $x$ ,  $y$  and the current components by  $u$ ,  $v$ , the relative velocity components are

$$u_r = u - \frac{dx}{dt}, \quad v_r = v - \frac{dy}{dt}$$

The displacement  $r$  is equal to  $(x^2 + y^2)^{1/2}$  and the displacement components are

$$x = r u_r / (u_r^2 + v_r^2)^{1/2}$$

$$y = r v_r / (u_r^2 + v_r^2)^{1/2}$$

where

$$r = K (u_r^2 + v_r^2)^{1/2}$$

Hence, by substitution

$$x = (Kr)^{1/2} u_r = (Kr)^{1/2} (u - \frac{dx}{dt})$$

$$y = (Kr)^{1/2} v_r = (Kr)^{1/2} (v - \frac{dy}{dt})$$

These equations yield the mooring response equations

$$\frac{dx}{dt} = u - x/(Kr)^{1/2}$$

$$\frac{dy}{dt} = v - y/(Kr)^{1/2}$$

where  $u$ ,  $v$  are assumed to be known functions of time.

The mooring response equations can be solved explicitly in three important cases. These correspond to a step increase in speed, and a uniformly rotating velocity vector of constant magnitude.

#### Case I

Assume  $x = y = 0$ ,  $u = u_0$ ,  $v = 0$  at  $t = 0$

This case corresponds to a step increase in speed at  $t = 0$ .

The appropriate equation is

$$\frac{dx}{dt} = u_0 - \left(\frac{x}{K}\right)^{\frac{1}{2}}$$

The solution, in implicit form, is

$$\tau = -2Ku_0 \left\{ \ln[1 - (x/Ku_0^2)^{\frac{1}{2}}] - (x/Ku_0^2)^{\frac{1}{2}} \right\}$$

The asymptotic behavior is

$$x \rightarrow Ku_0^2 \text{ as } t \rightarrow \infty.$$

### Case II

Assume  $x = Ku_0^2$ ,  $y = 0$ ,  $u = v = 0$  at  $t = 0$ .

This case corresponds to a step decrease in speed at  $t = 0$ . The appropriate equation is

$$\frac{dx}{dt} = -(x/K)^{\frac{1}{2}}$$

The solution is

$$x = Ku_0^2 \left(1 - \frac{t}{2Ku_0}\right)^2, \quad 0 \leq t < 2Ku_0$$

$$= 0, \quad t > 2Ku_0$$

In both cases, the displacement scale (characteristic displacement) is  $Ku_0^2$ , and the time scale is  $2Ku_0$ . Thus, the compliance constant  $K$  is useful in estimating both the time constant and displacement of a mooring to describe its performance. Sample calculations for  $K$  are given in Table 2. The compliance constant provides an extremely simple comparative description of the response of different mooring configurations.

Cases I and II are combined in Figure 1 to show the response to a current in the form of a step function. The mooring displacement, speed and relative current are shown to illustrate the effects of the motion.

### Case III

Assume  $u = u_0 \cos \omega t$ ,  $v = u_0 \sin \omega t$

This case corresponds to a uniformly rotating current of magnitude  $u_0$ .

The rotation period is  $2\pi/\omega$ .

The mooring is assumed to move through a circular orbit of radius  $r$  such that

$$x = r \cos \theta$$

$$y = r \sin \theta$$

where  $\theta$  is the displacement angle measured from the  $x$  axis.

Substitution into the response equations yields

$$-r\ddot{\theta} \sin \theta = u_0 \cos \omega t - (r/K)^{1/2} \cos \theta$$

$$r\ddot{\theta} \cos \theta = u_0 \sin \omega t - (r/K)^{1/2} \sin \theta$$

Rearranging terms

$$\cos \omega t = \left(\frac{r}{Ku_0^2}\right)^{1/2} \cos \theta - \frac{r\ddot{\theta}}{u_0} \sin \theta = \cos(\theta + \lambda)$$

$$\sin \omega t = \left(\frac{r}{Ku_0^2}\right)^{1/2} \sin \theta + \frac{r\ddot{\theta}}{u_0} \cos \theta = \sin(\theta + \lambda)$$

These equations require

$$r = K(u_0^2 - r^2\dot{\theta}^2) = K(u_0^2 - r^2\omega^2)$$

$$\dot{\theta} = \omega$$

$$\tan \lambda = \omega \sqrt{Kr}$$

The radius of the displacement circle is

$$r = [(4K^2u_0^2\omega^2 + 1)^{1/2} - 1]/2K\omega^2$$

$$\approx u_0/\omega \quad \text{for } \omega \gg \frac{1}{2} Ku_0$$

$$\approx Ku_0^2 \quad \text{for } \omega \ll \frac{1}{2} Ku_0$$

For rapid rotation, the mooring tends to be advected by the flow ( $r\omega = u_0$ ) so that the relative current is small. For slow rotation, the mooring is near the equilibrium position for a steady current and its motion does not affect the relative current appreciably. The ratio of magnitudes of the relative current to the absolute current is

$$(u_r^2 + v_r^2)^{1/2}/u_0 = (r/Ku_0^2)^{1/2} = (u_0^2 - r^2)^{1/2}/u_0$$

$$\sim (1 - (\omega/\omega_0)^2)^{1/2} \text{ for } \omega < \omega_0 = 1/Ku_0$$

$$\sim (\omega_0/\omega)^{1/2} \text{ for } \omega > \omega_0$$

For subsurface moorings of the type used at WHOI, the time constant  $Ku_0$  is about 10 minutes in a 1 knot current. The period, corresponding to  $\omega_0$ , is  $2\pi Ku_0 \sim 1$  hour. The attenuation of rotary currents of tidal or inertial period ( $>12$  hours) is less than 2%. Because the mooring motion is nearly at right angles to the current at low frequencies, the contribution to the speed is a small second-order effect.

The relative direction of flow differs from the true direction at low frequencies,

$$\tan \lambda \sim \omega/\omega_0 \sim 0.1 \text{ for tidal period}$$

so that

$$\lambda \sim 5^\circ.$$

The relative current direction lags behind the absolute current direction.

### Launching Transient

Subsurface float moorings are launched buoy first and anchor last. As the anchor drops, the mooring is gradually pulled under toward a vertical position. The anchor reaches bottom while the mooring is still inclined as much as  $15^\circ$  from the vertical. Because of the tilt, the subsurface float exceeds its equilibrium depth. The subsequent recovery toward the vertical is governed by a balance of drag and restoring forces similar to the transient considered in Case II. The transient can be followed by measuring the pressure at the subsurface float. A pressure record from mooring 161 set near Bermuda is shown in Figure 2. The overshoot of the float is relatively small (15.6 m).

In the absence of strong currents, the mooring response is similar to the example considered in Case II. To the same approximation used in the response equations, the pressure increase, due to the initial dip of the subsurface float, is given by

$$\Delta P = P - P_{eq} = \frac{1}{2} \rho g r^2 / L$$

where  $P_{eq}$  is the final equilibrium pressure and  $g$  is gravity.

Assuming negligible current, the change of pressure with time, found by substituting the transient solution for  $r$ , is

$$\Delta P = \frac{1}{2} \rho g \frac{R_o^2}{L} \left(1 - \frac{t}{2Ku_o}\right)^4$$

$$= \Delta P_o \left(1 - \frac{t}{2Ku_o}\right)^4$$

where  $\Delta P_o = \frac{1}{2} \rho g R_o^2 / L$  is the maximum value of the pressure overshoot.

The ratio  $(\Delta P / \Delta P_o)^{1/4}$  is a linear function of time and its slope is related to the time constant  $Ku_o$ . The variation of this ratio with time and the horizontal displacement  $r$  from equilibrium are shown in Figure 3.

The slope corresponds to a time constant

$$T_o = Ku_o \approx 600 \text{ sec (10 minutes) .}$$

The initial displacement corresponding to  $\Delta P_o$  is 253 m. Thus, the compliance constant is

$$K = T_o^2 / R_o = 600^2 / 25,300 \approx 14.2 \text{ sec}^2/\text{cm}$$

For comparison, the compliance constant estimated in Table 2 from the mooring cross section is  $K = 11.4 \text{ sec}^2/\text{cm}$ . The agreement is satisfactory.

An independent comparison can be made using speeds measured by a current meter under the subsurface float. Assuming negligible current, the mooring speed is

$$\frac{dx}{dt} = -(u_o - t/2K)$$

The slope of the speed response curve depends only on the compliance constant. The comparison for mooring 161 is made in Figure 4. The sloping line in the figure is the rate of decrease of speed expected from the compliance constant evaluated from the pressure overshoot. The agreement is reasonable. The measured speed was considerably higher than calculated from the simple response equation during the first 5 minutes after the anchor reached bottom. A residual speed of 6 cm/sec produces a deviation from the final portion of the transient. The results obtained indicate that a good estimate of the response characteristics can be made from in situ measurements of the launching transient. The response characteristics, in turn, can be used to evaluate the quality of the recorded velocities.

### Buoy Tracking Experiments

Two surface buoys (Table 1) were tracked with azimuth telescopes from two locations in Bermuda as shown in Figure 5. The angles recorded were true bearings of the buoys from the observation sites. These bearings  $\theta_{1m}$  and  $\theta_{2m}$ , together with backsights  $\theta_{12}$  and  $\theta_{21}$ , as shown in Figure 5, define the buoy location with respect to a rectangular



coordinate system with origin at (1) through the equations

$$x = \frac{L \sin (\theta_{21} - \theta_{2m}) \sin \theta_{1m}}{\sin (\theta_{2m} - \theta_{1m})}$$

$$y = \frac{L \sin (\theta_{21} - \theta_{2m}) \cos \theta_{1m}}{\sin (\theta_{2m} - \theta_{1m})},$$

where  $L$  is the distance between the two observation points (3.0 nautical miles).

Readings were made every five minutes when the buoys were visible. A sample of the bearings recorded at the two stations is shown in Figure 6. The readings were converted to rectangular coordinates for plotting. Hourly positions of moorings 158 and 160 are given in Tables 3 and 4 respectively. The origin of the tabulated positions is chosen relative to the Paynters Hill tracking site. The north and east coordinates of the two moorings are plotted against time in Figures 7 and 8. The positions of floats are replotted in Figures 9 and 10 to show excursions of the moorings. The speed of the floats was quite low. The largest hourly displacement was about 77 meters corresponding to a mean speed of 2.1 cm/sec. The maximum excursions were less than 1 kilometer for both surface moorings.

Tension and current speed were measured near the surface on mooring 160. Some correlation between speed and tension was found (Figure 11) although the scatter was high. Current meters were placed at deeper levels, but the lower portion of the mooring was not recovered. The nylon mooring cable parted as a result of "fish bite" on May 15th and the float was recovered adrift.

More detailed comparisons of mooring motion and measured currents could not be made. Little correlation was found between current records obtained near mooring 160. The velocity field was probably complicated by the presence of the island of Bermuda. The experiment, however, showed that mooring motion was not a major problem for measurement of currents of the type observed near Bermuda.

#### ACKNOWLEDGEMENT

The moored buoy tracking experiments were carried out as part of a program of development - and use of moored buoys at the Woods Hole Oceanographic Institution supported by the Office of Naval Research under Contracts Nonr 3351(00) and Nonr 2195(00).

The cooperation of personnel at the U.S. Navy Sofar Station in making the tracking facilities available and at the Bermuda Biological Station for logistic support are appreciated.

### References

Fofonoff, N.P., 1965 A Technique for analyzing buoy system motion. Geo-Marine Technology, 1 (7) 222-225.

Webster, F. and N.P. Fofonoff, 1966. A compilation of moored current meter observations. Vol. 11.  
W.H.O.I. Ref. 66-60.

### List of Figures

- Figure 1. Response of a mooring to a step function current. The displacement unit is  $Ku_0^2$  and the time unit  $Ku_0$ . The displacement (a) is shown for a current applied at  $t = 0$  and removed at  $t = 10$  units. The mooring speed (b) scaled by  $u_0$  is subtracted from the current to yield the relative speed (c) that would be sensed by a current meter on the mooring.
- Figure 2. A pressure record from mooring 161 showing the overshoot during the launching transient.
- Figure 3. The pressure ratio and horizontal displacement of the mooring during the launching transient.
- Figure 4. Speed record from a current meter located 150 m below the subsurface float. The straight line shows the speed calculated for a launching transient in still water for  $K = 14.2 \text{ cm}^2/\text{sec}$ .
- Figure 5. Location of tracking stations and surface float moorings 158 and 160 used for the tracking experiments.
- Figure 6. Examples of bearings recorded at 5-minute intervals at the two tracking stations. Some short period fluctuations can be seen. These are not explained.
- Figure 7. North and east components of mooring 158 plotted against time. The moorings were not visible from sunrise to noon because of adverse sun angle.
- Figure 8. North and east components of mooring 160 plotted against time.
- Figure 9. Excursions of mooring 158 during tracking.
- Figure 10. Excursions of mooring 160 during tracking.
- Figure 11. Tension versus speed for mooring 160. Measurements were taken at 60 m depth below the surface float. The circles indicate readings after the mooring went adrift.
- Figure 12. Tension calibration curves before and after exposure.


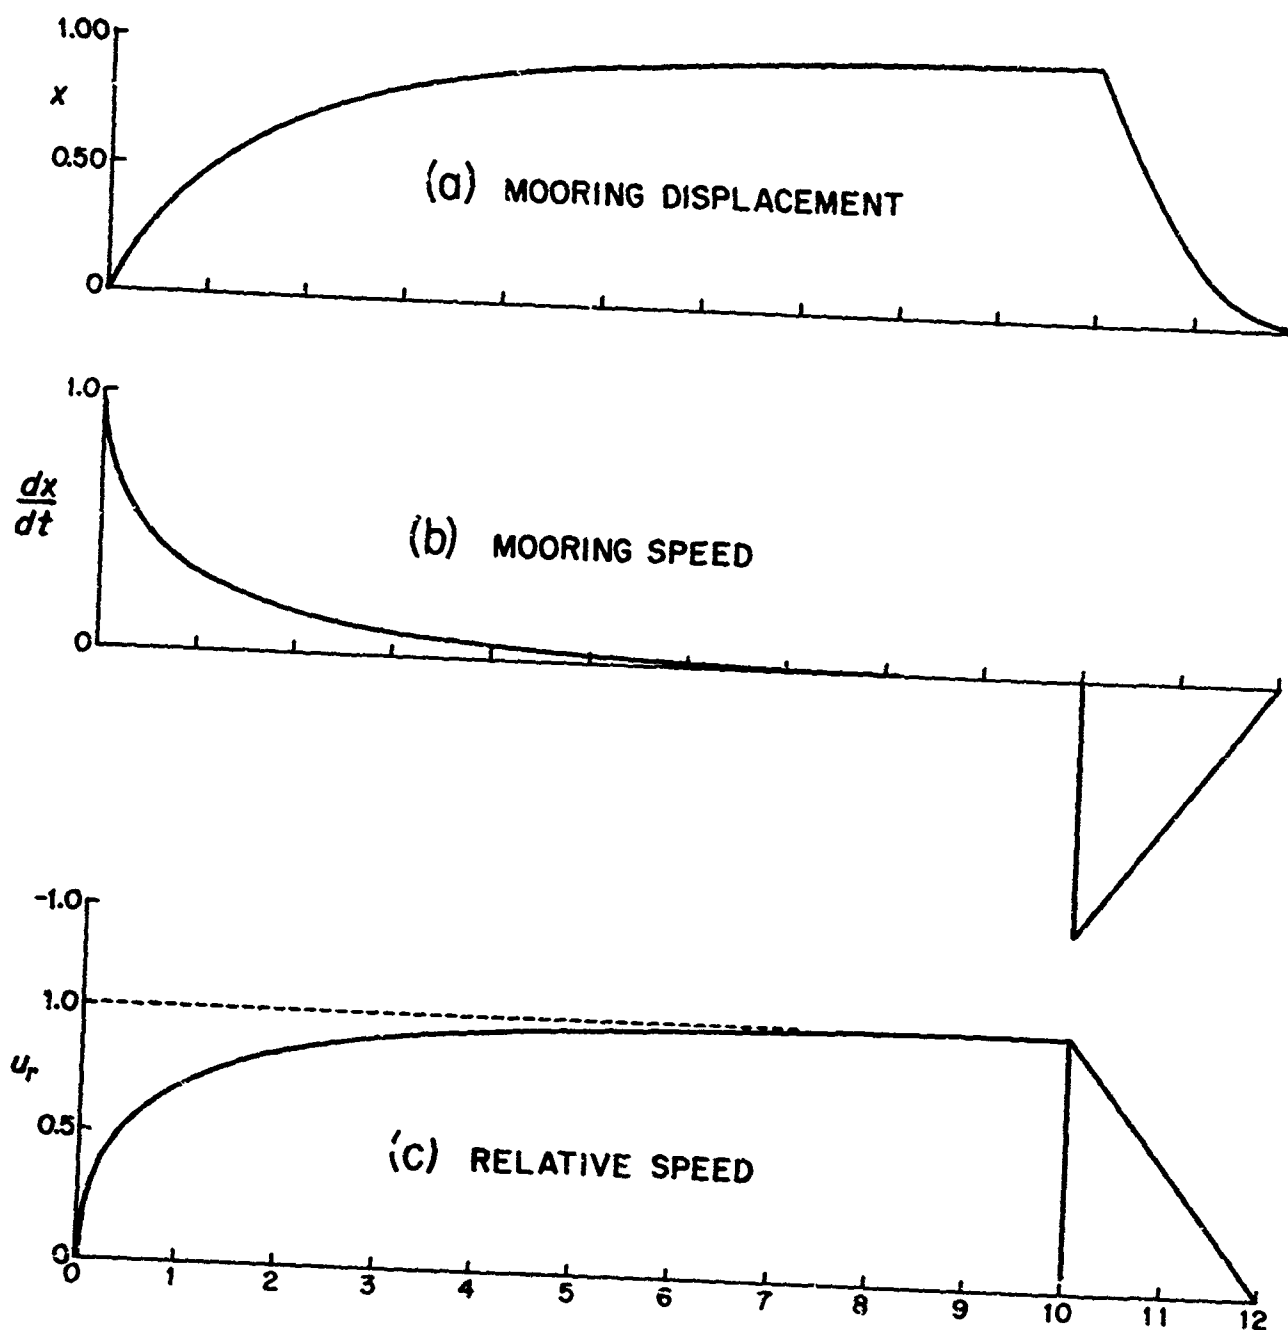


Figure 1. Response of a mooring to a step function current. The displacement unit is  $Ku_0^2$  and the time unit  $Ku_0$ . The displacement (a) is shown for a current applied at  $t = 0$  and removed at  $t = 10$  units. The mooring speed (b) scaled by  $u_0$  is subtracted from the current to yield the relative speed (c) that would be sensed by a current meter on the mooring.

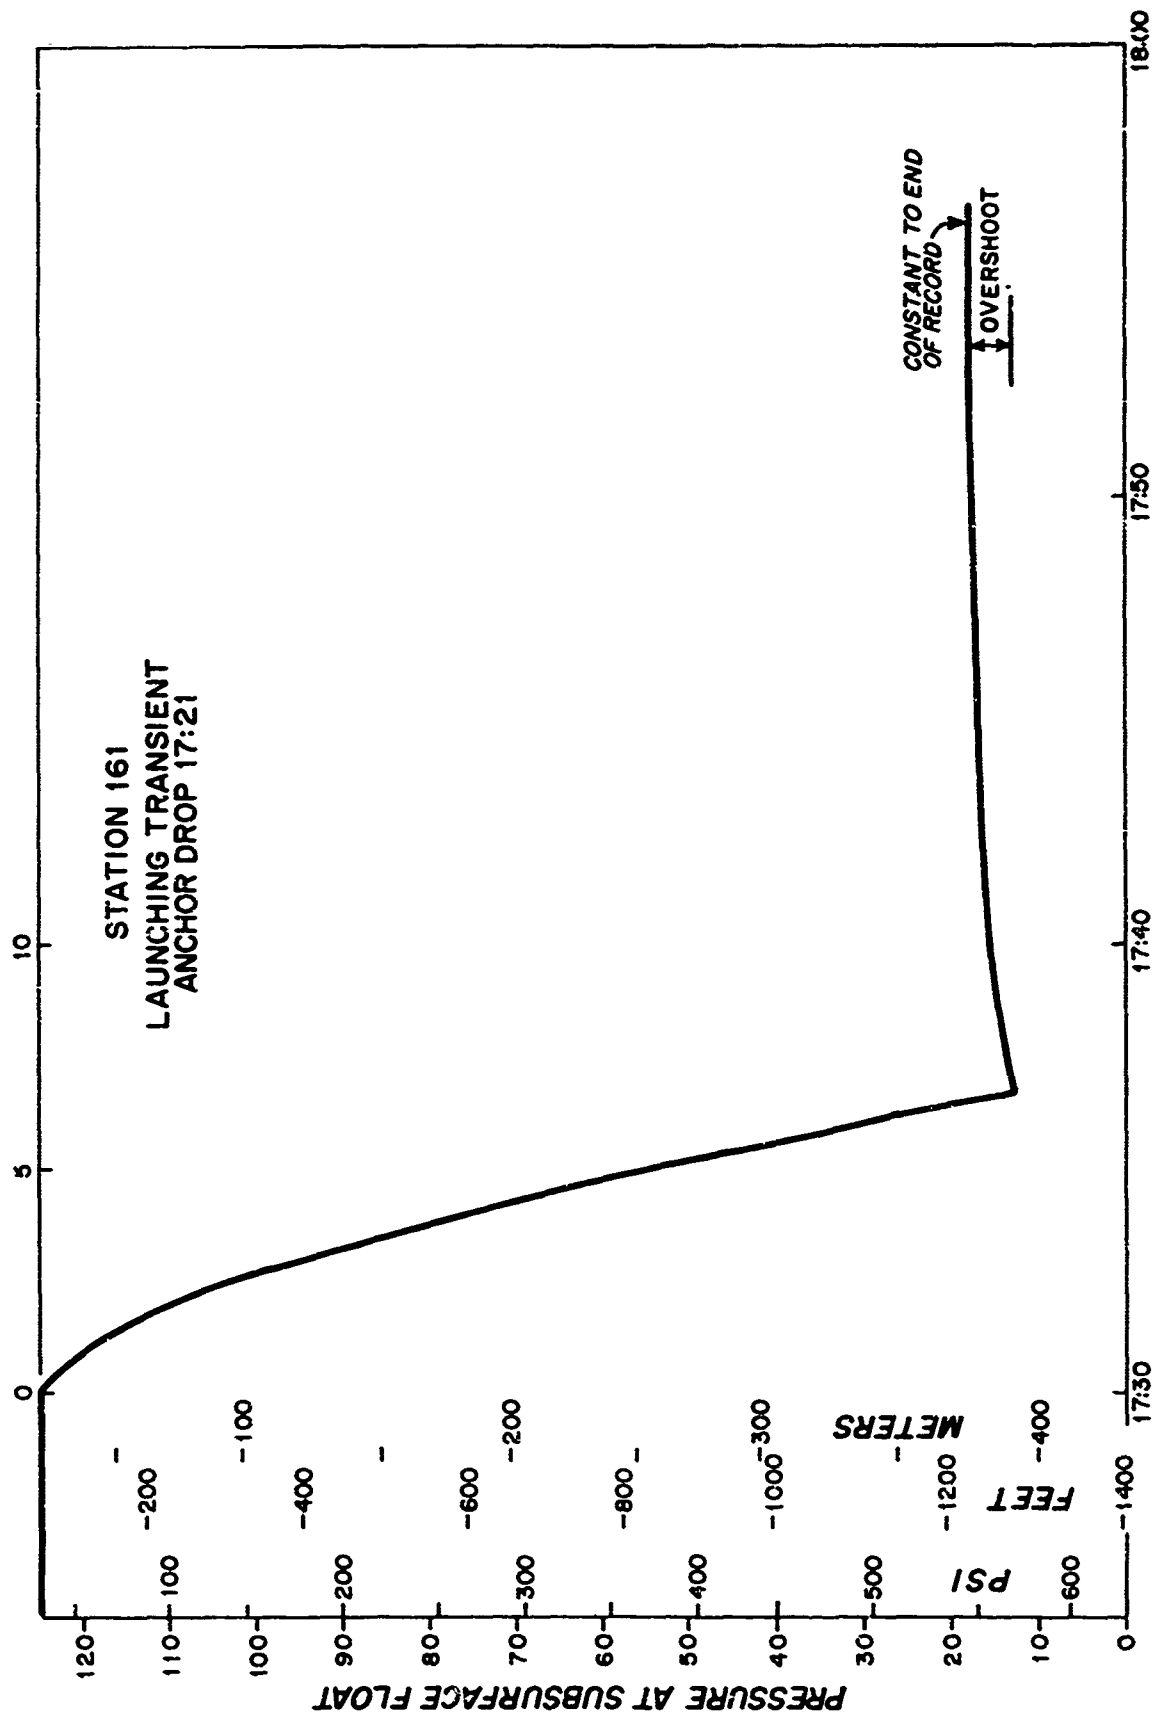

MAY 11, 1964

Figure 2. A pressure record from mooring 161 showing the overshoot during the launching transient.

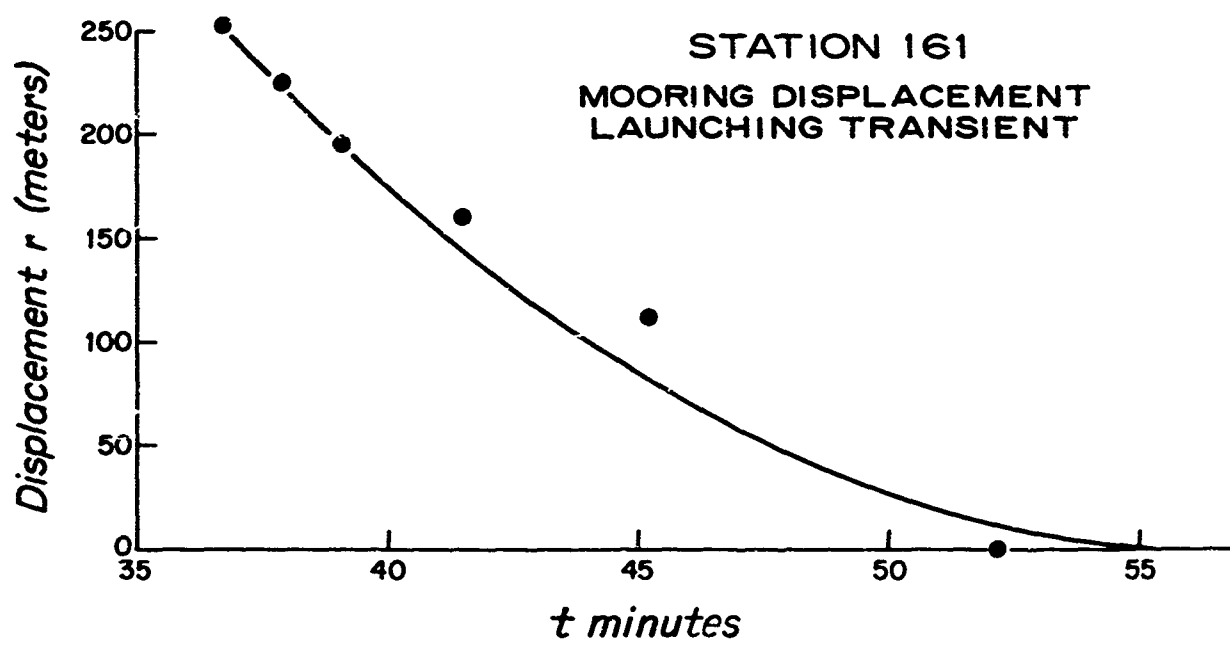
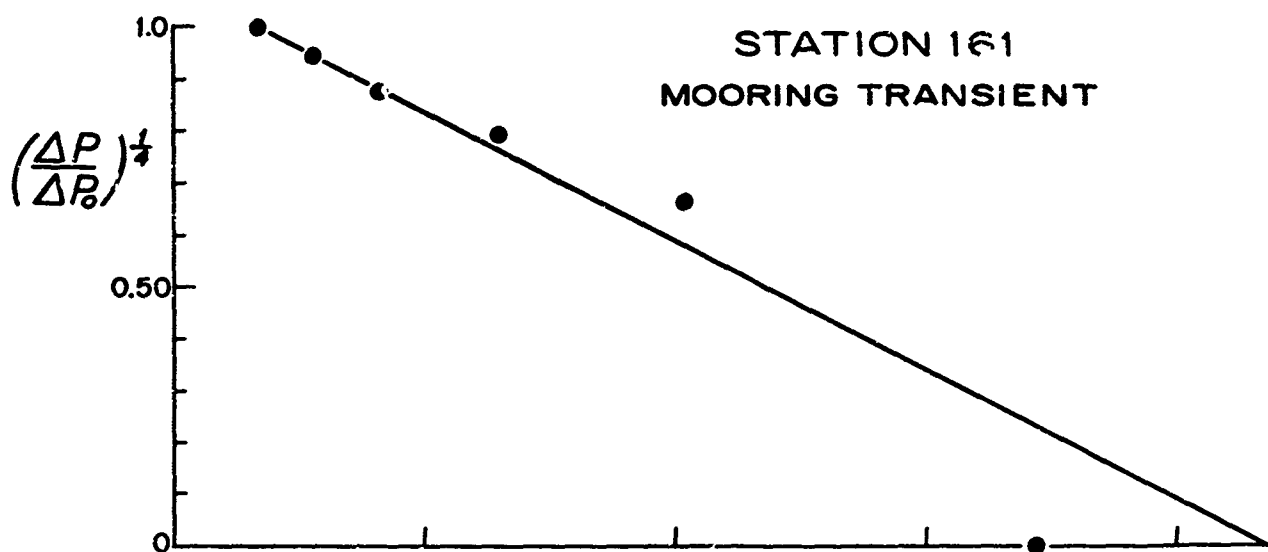


Figure 3. The pressure ratio and horizontal displacement of the mooring during the launching transient.

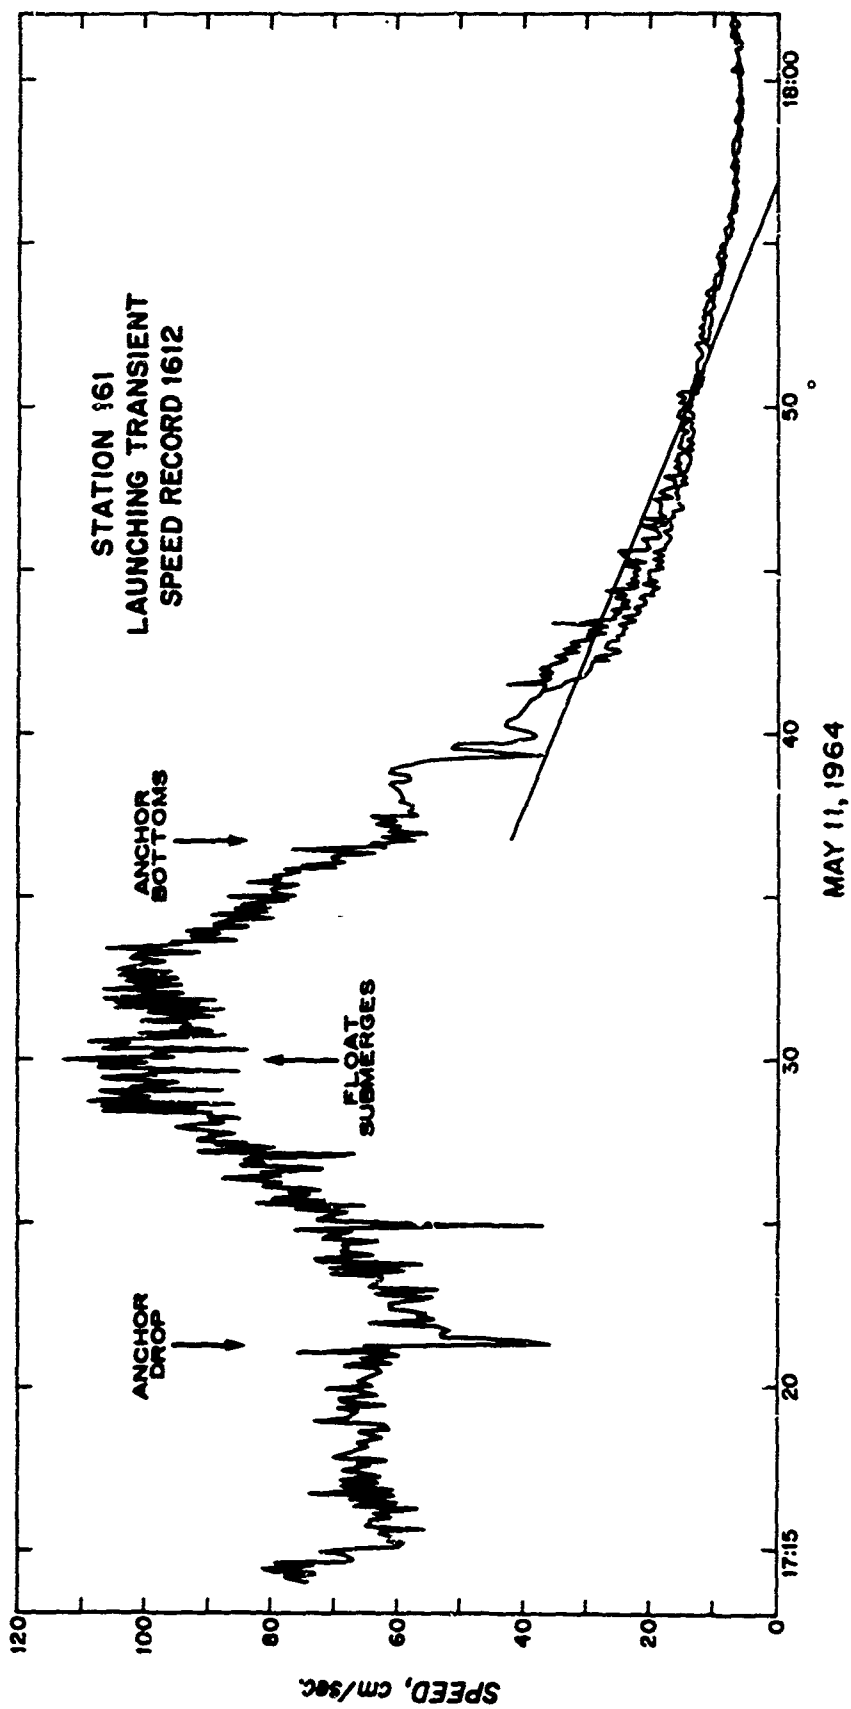


Figure 4. Speed record from a current meter located 150 m below the subsurface float. The straight line shows the speed calculated for a launching transient in still water for  $K = 14.2 \text{ cm}^2/\text{sec}$ .

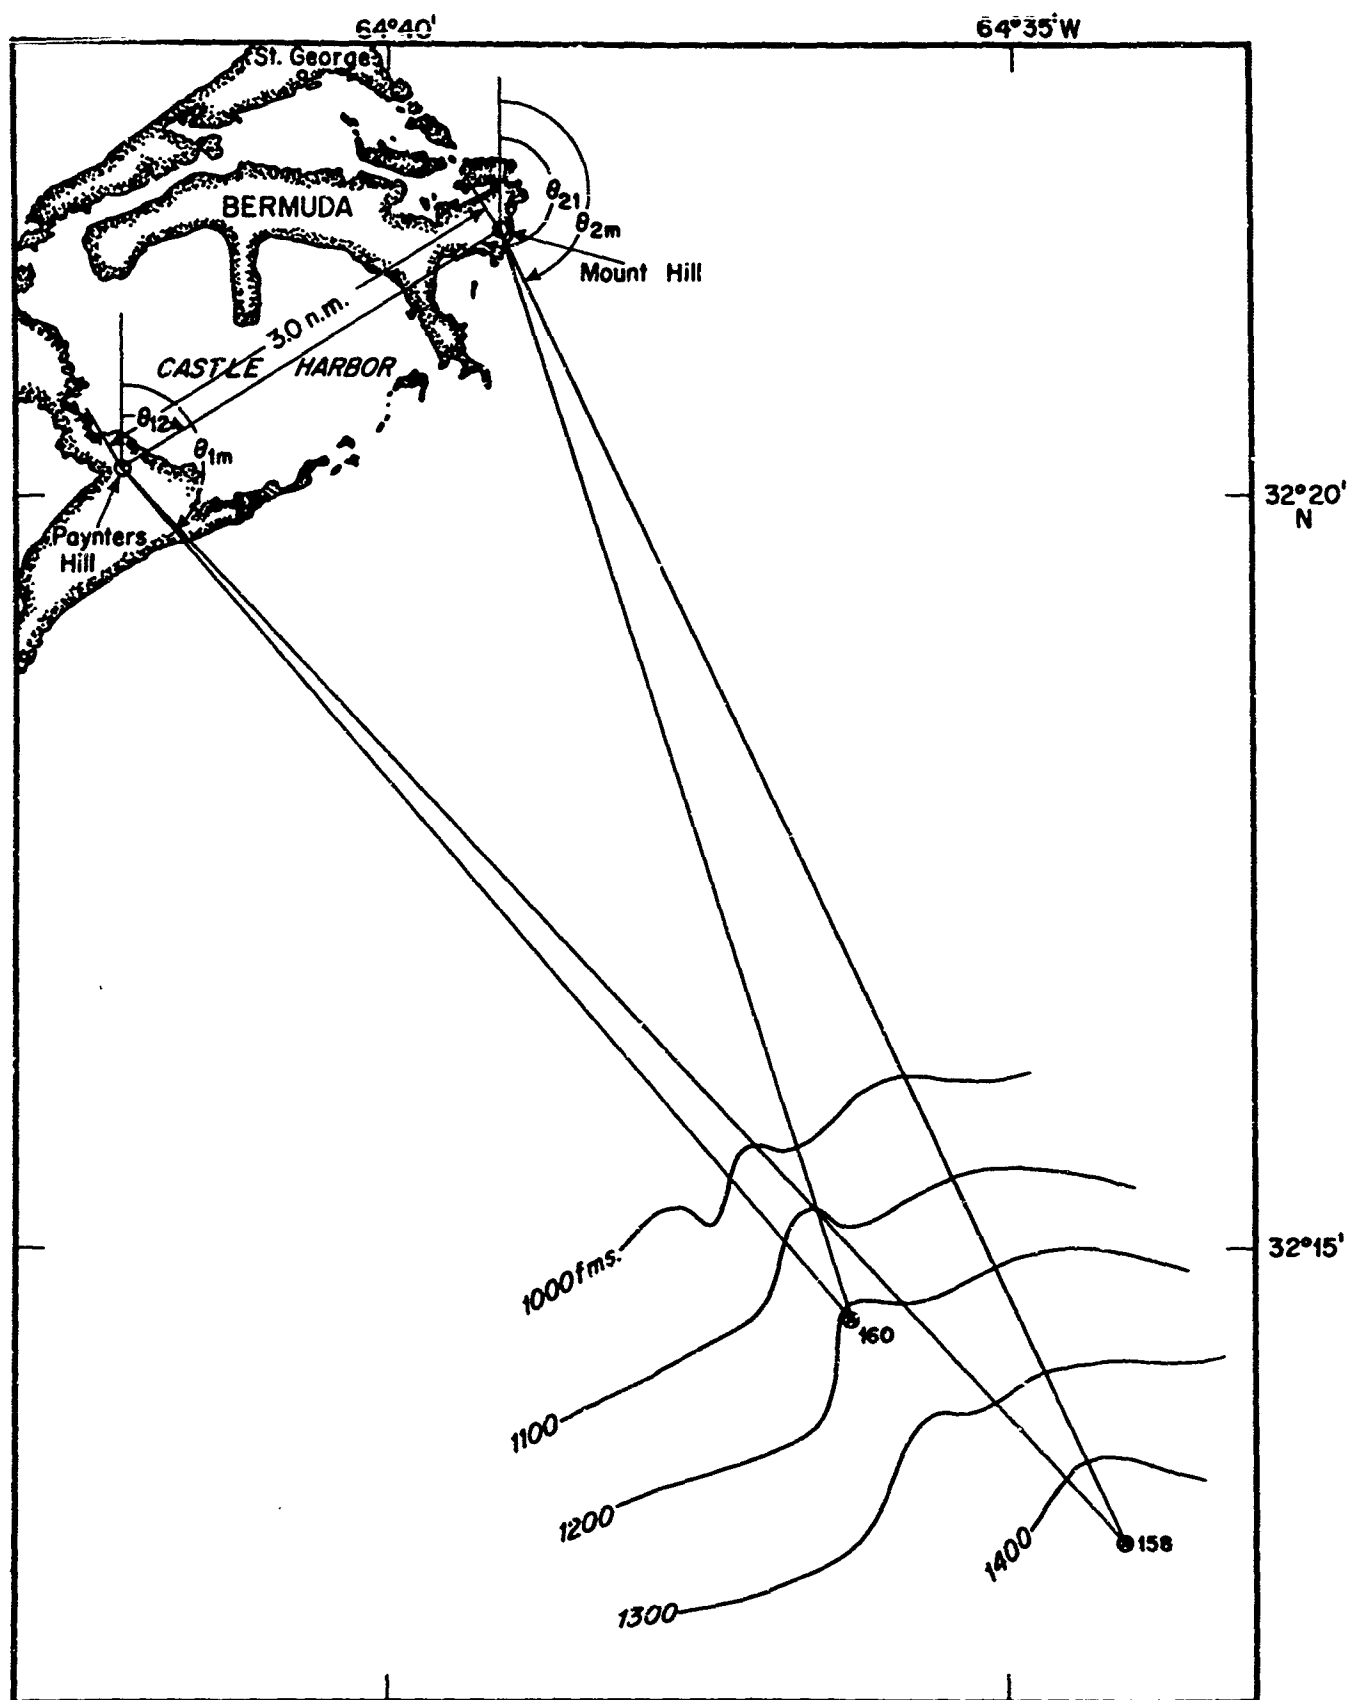


Figure 5. Location of tracking stations and surface float moorings 158 and 160 used for the tracking experiments.



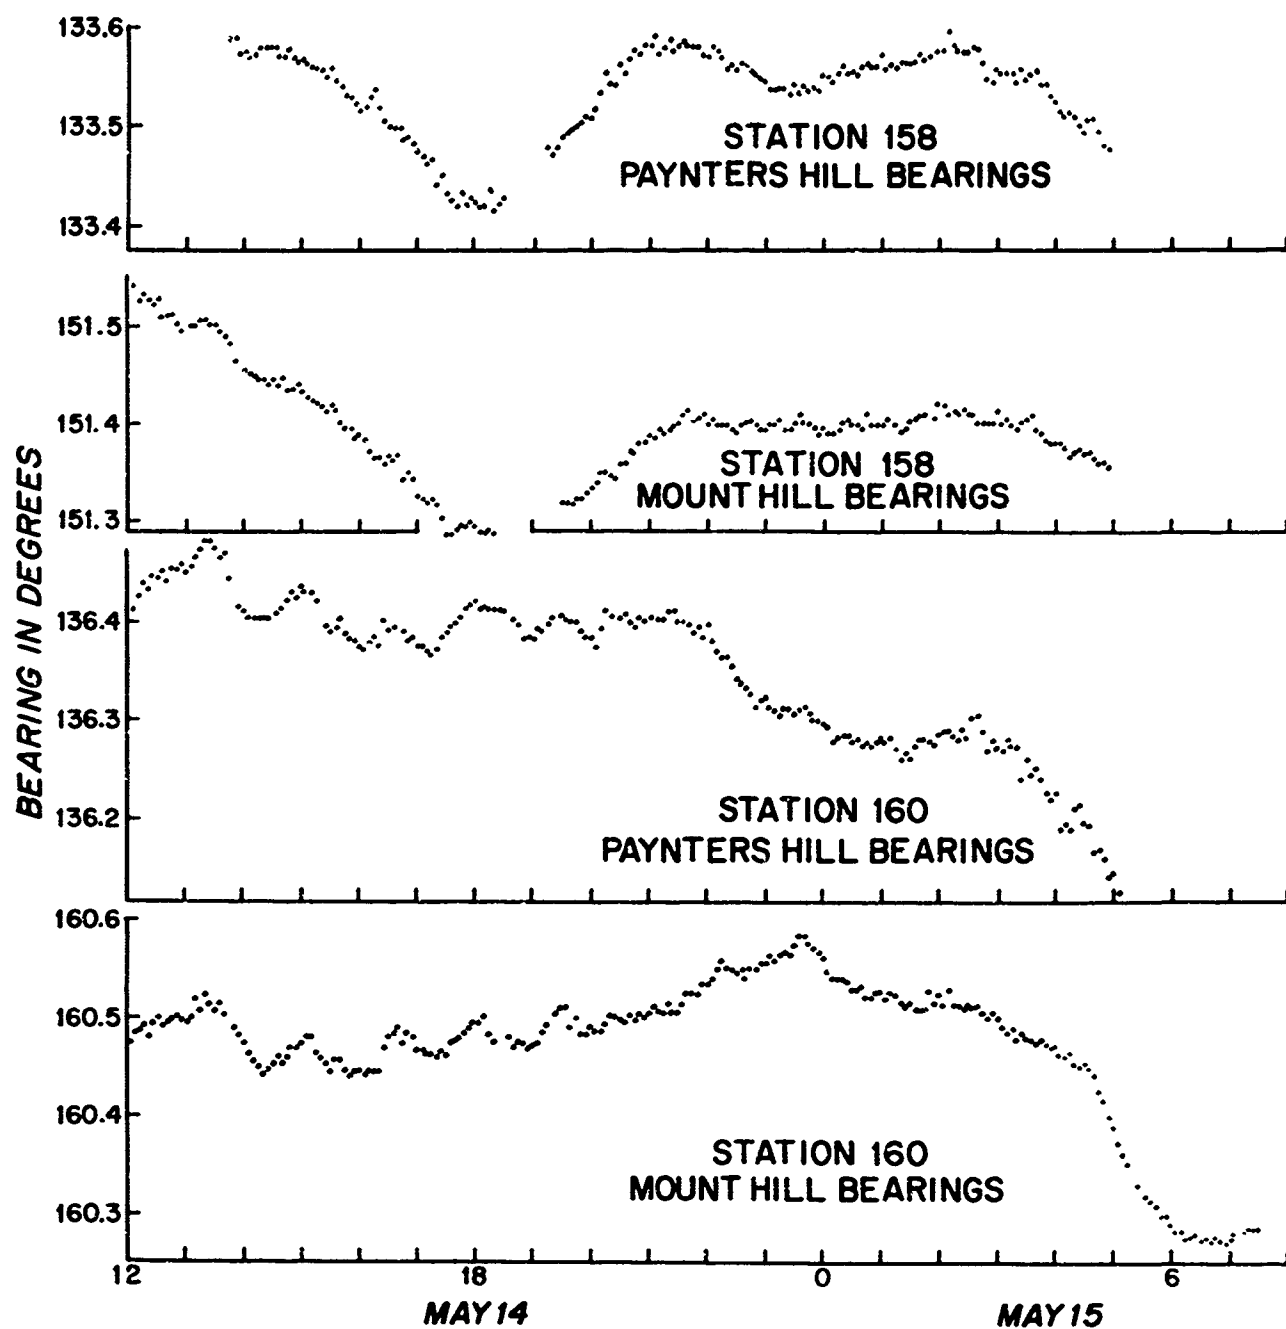


Figure 6. Examples of bearings recorded at 5-minute intervals at the two tracking stations. Some short period fluctuations can be seen. These are not explained.

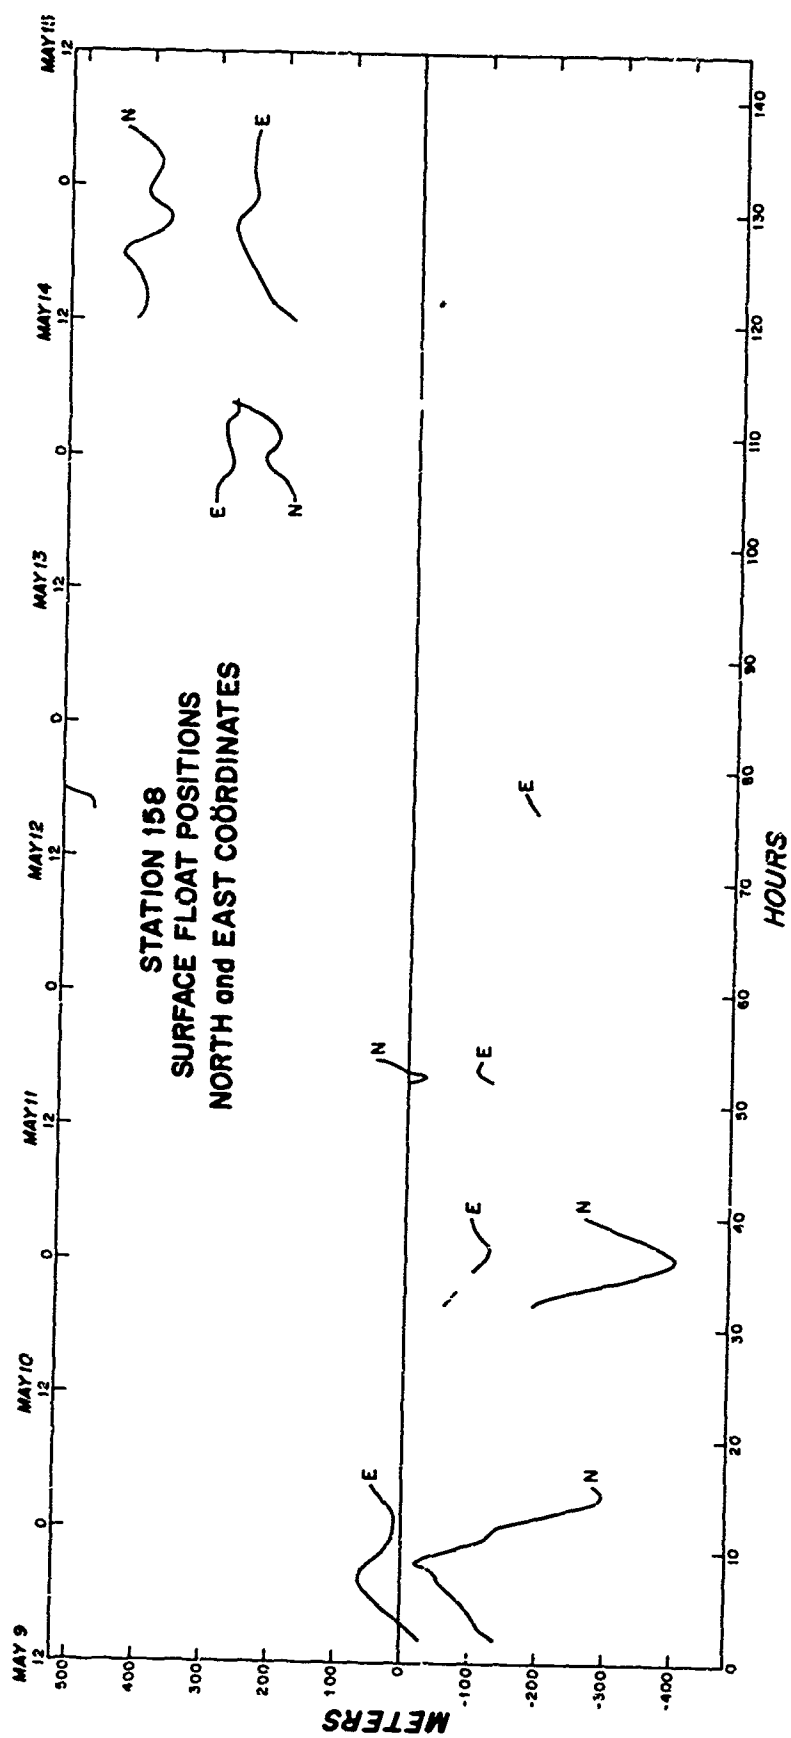


Figure 7. North and east components of mooring 158 plotted against time. The moorings were not visible from sunrise to noon because of adverse sun angle.

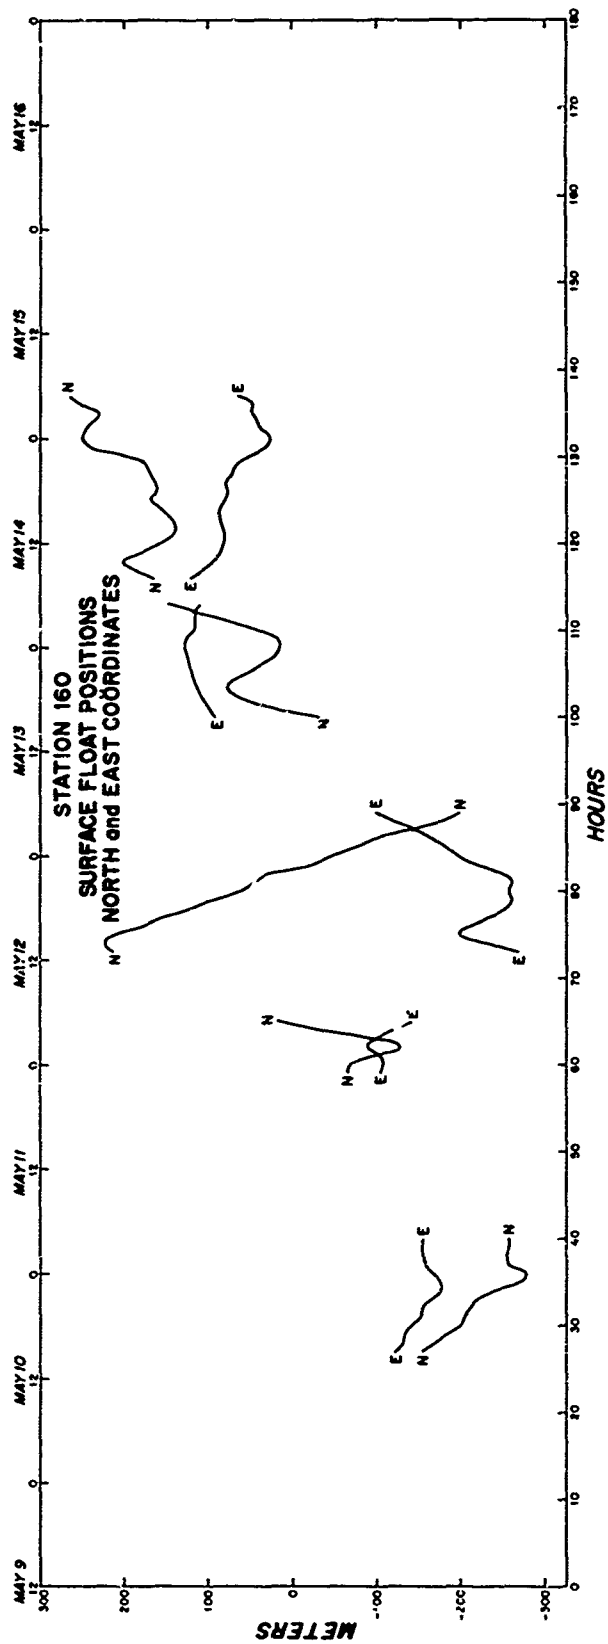


Figure 8. North and east components of mooring 160 plotted against time.

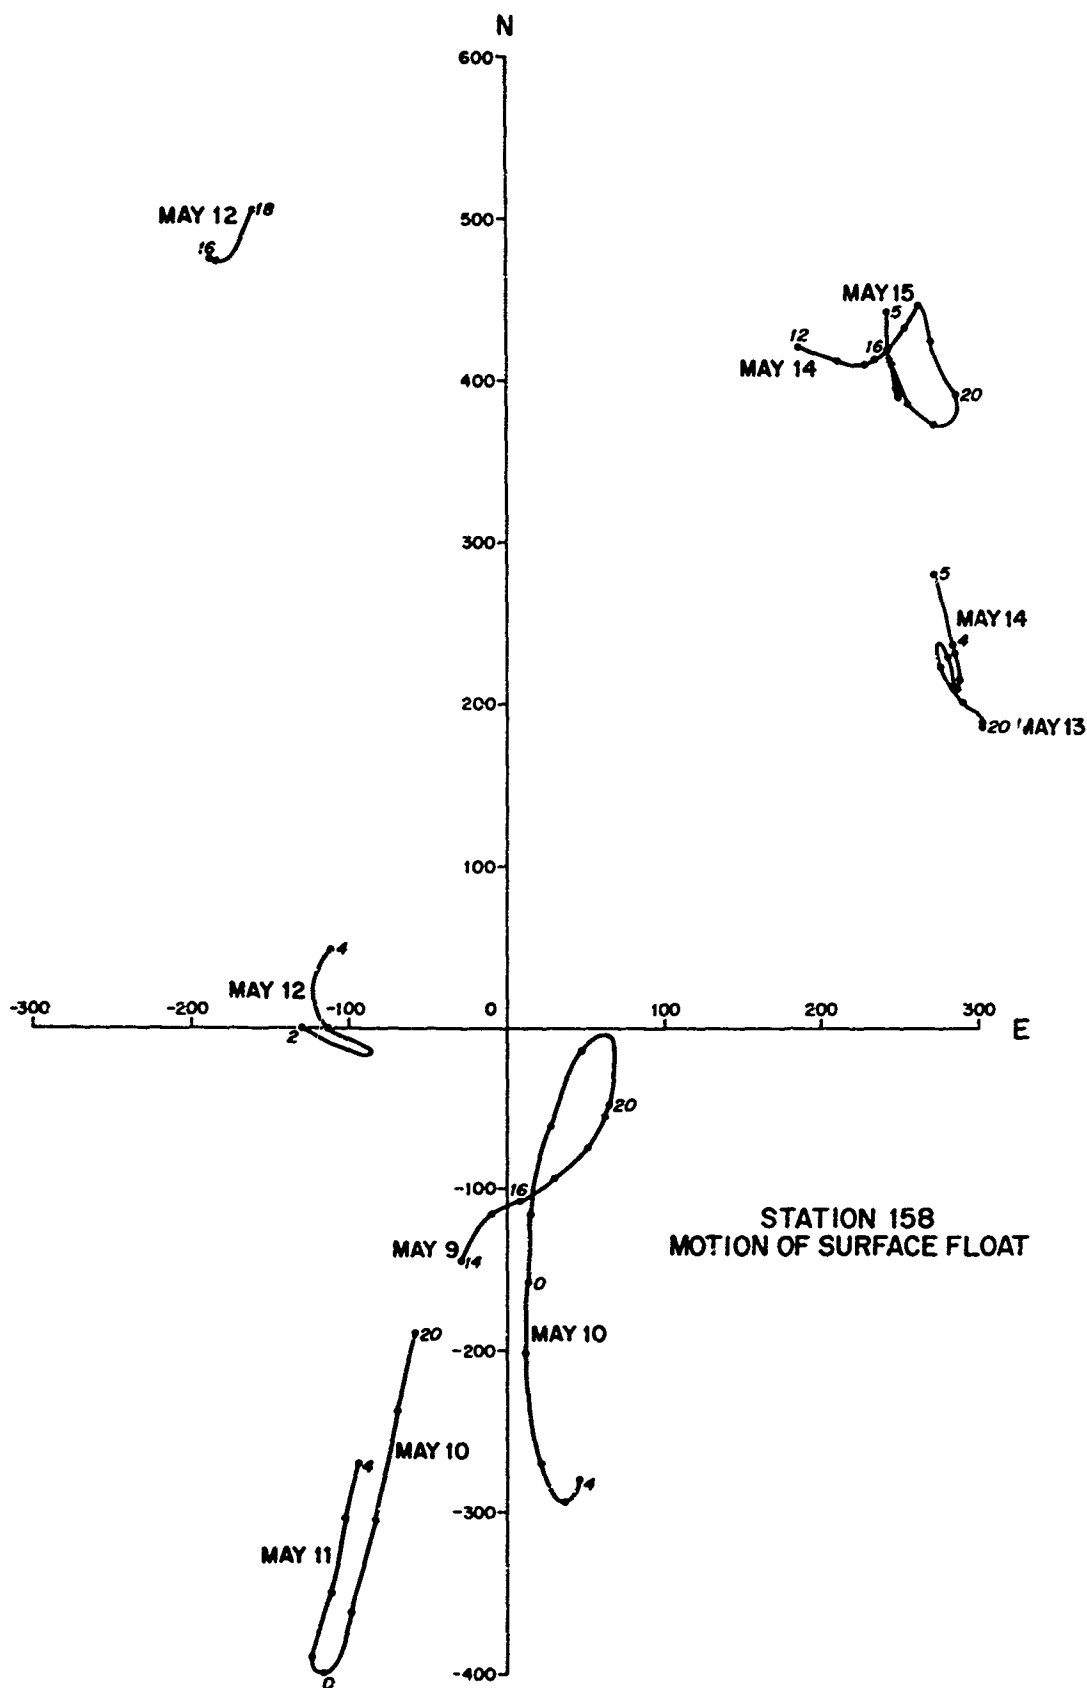


Figure 9. Excursions of mooring 158 during tracking.



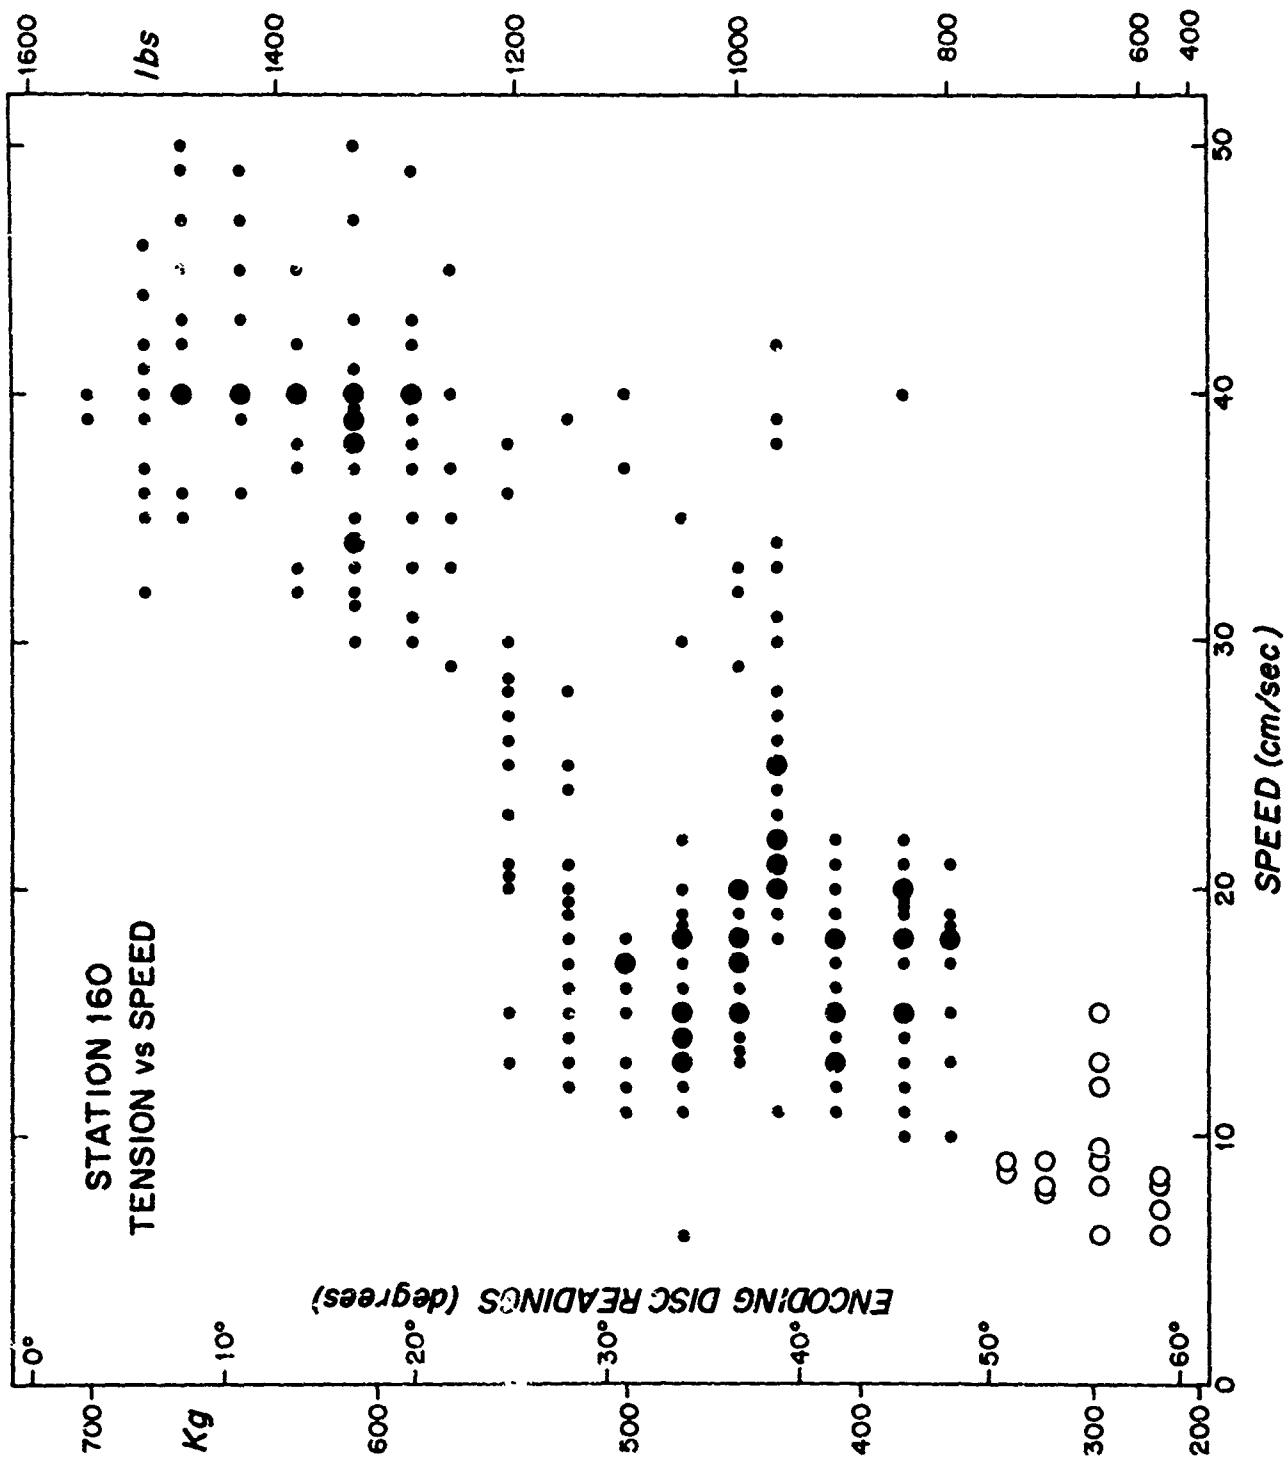


Figure 11. Tension versus speed for mooring 160. Measurements were taken at 60 m depth below the surface float. The circles indicate readings after the mooring went adrift.

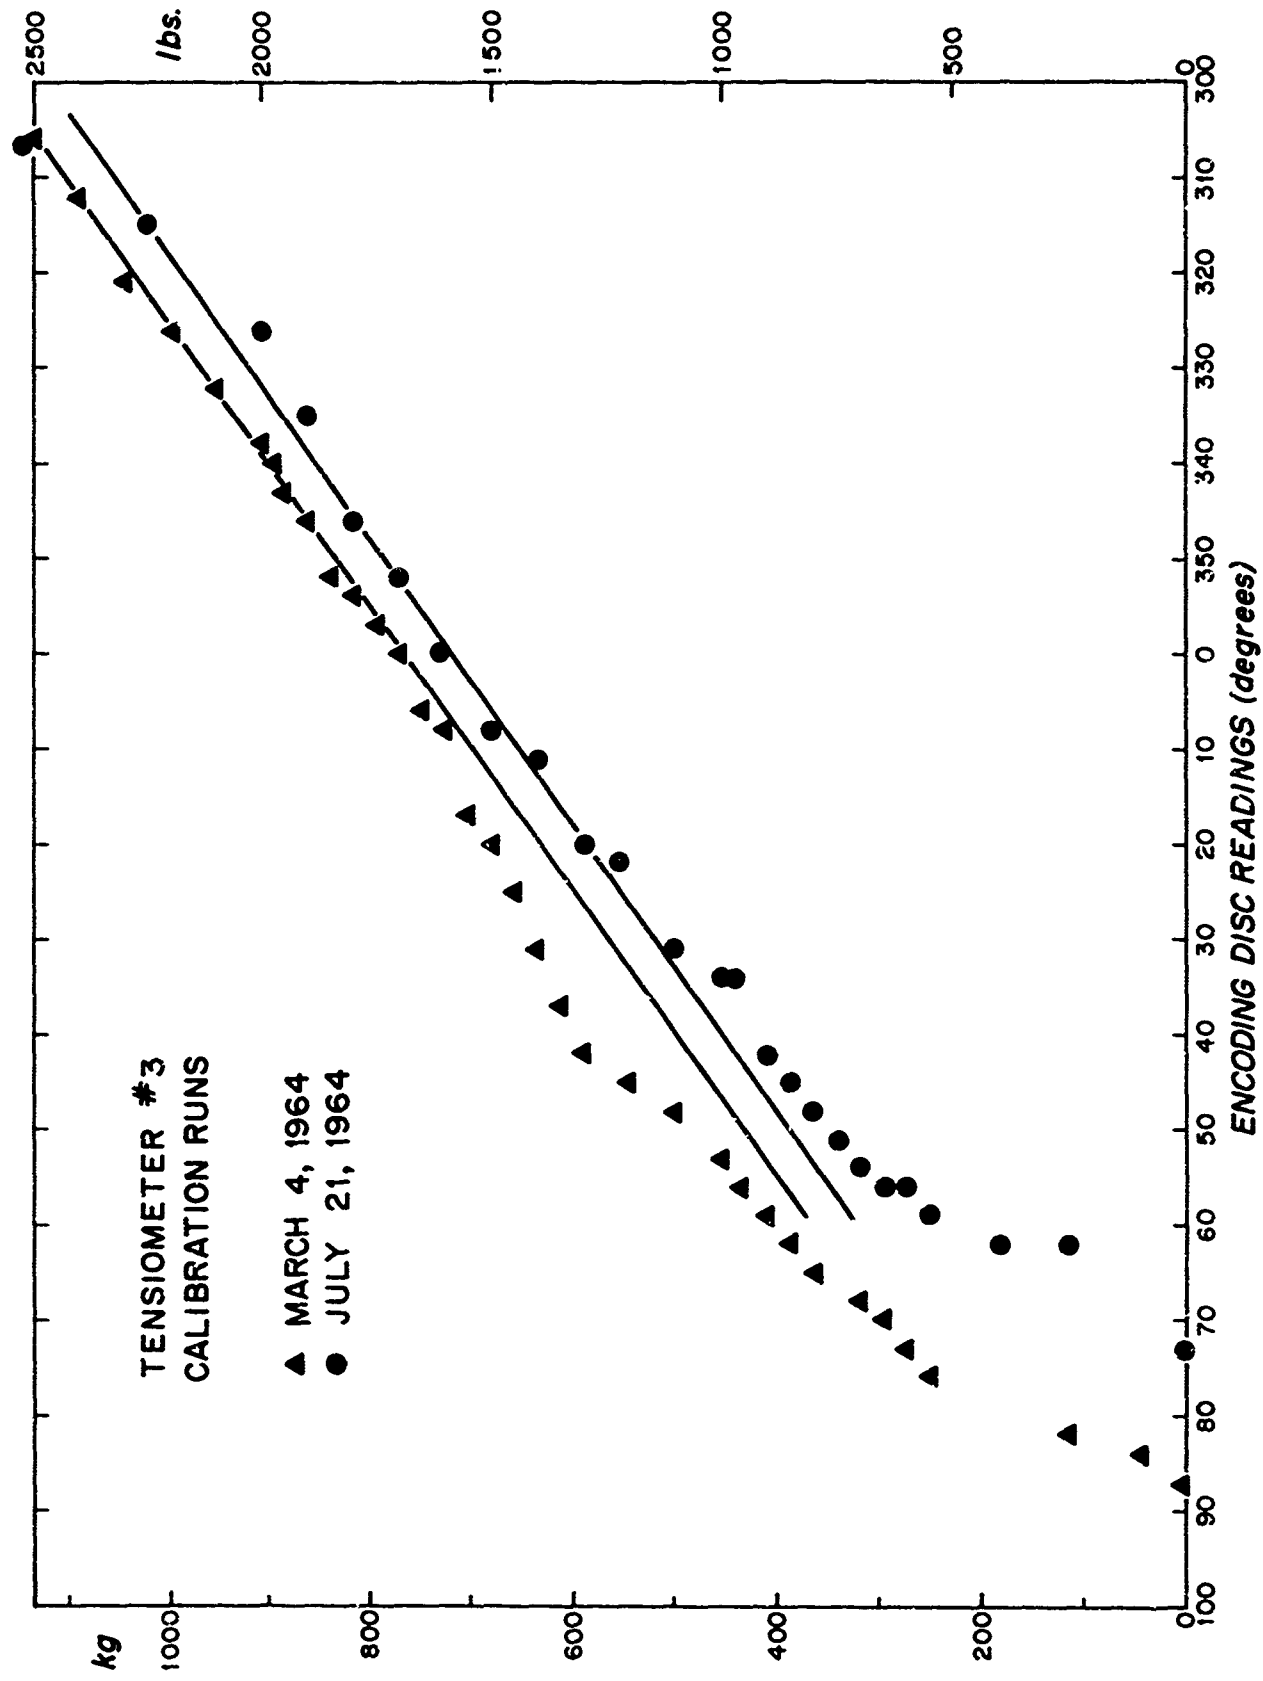


Figure 12. Tension calibration curves before and after exposure.

List of Tables

Table 1	Description of Moorings (May 8-May 16, 1964)
Table 2	Calculation of Mooring Compliance Constant
Table 3	Station 158 - Coordinates of Surface Float
Table 4	Station 160 - Coordinates of Surface Float



TABLE 1

Description of Moorings

May 8—May 16, 1964

<u>Station No.</u>	<u>158</u>	<u>159</u>	<u>160</u>	<u>161</u>	<u>162</u>
Set	8 11:52	10 11:54	10 14:29	11 17:21	12 17:20
Recovered	15	16 11:00	16 14:15	14 11:47	15 10:58
Latitude	32°13.1'N	32°14.8'N	32°14.6'N	32°15.4'N	32°17.0'N
Longitude	64°34.1'W	64°35.1'W	64°36.3'W	64°31.8'W	64°37.2'W
Depth (meters)	2670	2140	2157	2430	2140
Type	Surface float	Subsurface float	Surface float	Subsurface float	Subsurface float
Scope	Approx. 100%	---	90%	---	---
Depth to float	---	140 m.	---	344 m.	118 m.
Moorings line	9/16" Polypropylene (jacketed)	Steel cable	9/16" plaited nylon	Steel cable	Steel cable
Special measurements	Surface wind	---	Line tension	Pressure	Pressure

TABLE 2. Calculation of Mooring Compliance Constant

Compliance Constant for Mooring #161

$$K = \frac{1}{2} \rho C_D A L / T$$

$\rho \sim 1.0 \text{ gm/cm}^3$ , density of sea water

$C_D \sim 1.0$ , drag coefficient

$A = 5.44 \text{ m}^2$ , drag cross section of mooring

$L = 2054 \text{ m}$ , length of mooring cable

$T = 500 \text{ kg}$ , cable tension

Drag Cross Section of Upper 500 meters

Cable 500 m

Float 181 m (equivalent cable length)

3 Current meters 144 m

825 m

Cable diameter = 0.66 cm

Cross section  $A = 0.66 \times 825 \times 10^2 = 54,400 \text{ cm}^2$

Compliance Constant

$$K = \frac{1}{2} \frac{5.44 \times 10^4 \times 2.054 \times 10^5}{.981 \times 10^3 \times 5.0 \times 10^5} = 11.4 \text{ sec}^2/\text{cm}$$

For a current of 50 cm/sec ( $\sim 1 \text{ kt}$ )

$$R_o = K V_o^2 = 285 \text{ m}$$

$$T_o = K V_o = 570 \text{ sec } (9\frac{1}{2} \text{ min})$$

TABLE 3  
Station 158

Coordinates of Surface Float  
(hourly positions in meters)

hour	May 9		10		11		12		13		14		15	
	N	E	N	E	N	E	N	E	N	E	N	E	N	E
0			-158	+13	-400	-117					+228	+280	+408	+246
1			-202	+12	-390	-125					+210	+284	+393	+250
2			(-270)	(+21)	-350	-112	0	-130			+208	+286	+389	+250
3			-294	+36	-304	-103	0	-114			+214	+288	+396	+249
4			-280	+45	(-270)	(-95)	+48	-112			+236	+283	+412	+245
5											+280	+272	+442	+244
6														END
7														
8														
9														
10														
11														
12														
13														
14														
15														
16														
17														
18														
19														
20														
21														
22														
23														

( ) estimated

Origin

$x_0 = 12,900 \text{ m}$

$y_0 = 12,900 \text{ m}$

TABLE 4  
Station 160

Coordinates of Surface Float  
(hourly positions in meters)

hour	May 10		11		12		13		14		15	
	N	E	N	E	N	E	N	E	N	E	N	E
0			-176	-166	+ 32	-111	+ 53	-200	+114	+126	+350	+25
1			-156	-159	+ 7	-108	+ 24	-185	+113	+125	+345	+36
2			-156	-157	- 28	- 91	3	-169	+138	+112	+338	+38
3			-158	-155	- 4	-100	- 39	-152	+169	+114	+330	+48
4			-157	-157	+ 70	-122	- 79	-119	+206	+113	+350	+45
5					+117	-145	-101	- 99	+250	+106	+364	+56
6											+364	+70
7												END
8									+263	+120		
9									+285	+100		
10									+297	+ 89		
11									+269	+ 85		
12					(+300)	-290			+255	+ 80		
13					+314	-265			+239	+ 78		
14					+322	-238			+239	+ 81		
15					+307	-202			+247	+ 85		
16	- 56	-120			+276	-209			+257	+ 84		
17	- 70	-132			+248	-234	+ 75	+ 88	+266	+ 78		
18	- 83	-132			+220	-255	+120	+ 99	+260	+ 75		
19	-103	-144			+192	-263			+262	+ 77		
20	-105	-153			+160	-257			+266	+ 70		
21	-114	-155			+145	-263			+270	+ 67		
22	-115	-168			+122	-248			+294	+ 52		
23	-141	-179				-218			+337	+ 30		
	-171	-177	+ 33	-107								

( ) estimated

Origin  $x_0 = 9,200$  m

$y_0 = 10,000$  m

UNCLASSIFIED

Security Classification

DOCUMENT CONTROL DATA - R&D		
<small>(Security classification of title, body of abstract and indexing annotation must be entered when the overall report is classified)</small>		
1. ORIGINATING ACTIVITY (Corporate author)		2a. REPORT SECURITY CLASSIFICATION
Woods Hole Oceanographic Institution Woods Hole, Massachusetts		Unclassified
		2b. GROUP
3. REPORT TITLE		
MOORING MOTION		
4. DESCRIPTIVE NOTES (Type of report and inclusive dates)		
Technical Report		
5. AUTHOR(S) (Last name, first name, initial)		
Fofonoff, N. P. and Garrett, John		
6. REPORT DATE	7a. TOTAL NO. OF PAGES	7b. NO. OF REFS
May 1968	14	2
8a. CONTRACT OR GRANT NO.		9a. ORIGINATOR'S REPORT NUMBER(S)
Nonr-3351(00) NR 083-501 Nonr-2195(00) NR 083-004		WHOI Reference No. 68-31
c.		9b. OTHER REPORT NO(S) (Any other numbers that may be assigned this report)
d.		
10. AVAILABILITY/LIMITATION NOTICES		
This document has been approved for public release and sale; its distribution is unlimited.		
11. SUPPLEMENTARY NOTES		12. SPONSORING MILITARY ACTIVITY
		Office of Naval Research Washington, D.C.
13. ABSTRACT		
<p>A study of the horizontal displacement of moored buoys in response to currents. A simple theoretical model is used to interpret measured displacements of moorings set near Bermuda.</p>		

DD FORM 1473  
1 JAN 64

UNCLASSIFIED  
Security Classification

14. KEY WORDS	LINK A		LINK B		LINK C	
	ROLE	WT	ROLE	WT	ROLE	WT
Mooring Motion						
Mooring Compliance						
Launching Transients						

#### INSTRUCTIONS

1. **ORIGINATING ACTIVITY:** Enter the name and address of the contractor, subcontractor, grantee, Department of Defense activity or other organization (*corporate author*) issuing the report.

2a. **REPORT SECURITY CLASSIFICATION:** Enter the overall security classification of the report. Indicate whether "Restricted Data" is included. Marking is to be in accordance with appropriate security regulations.

2b. **GROUP:** Automatic downgrading is specified in DoD Directive 5200.10 and Armed Forces Industrial Manual. Enter the group number. Also, when applicable, show that optional markings have been used for Group 3 and Group 4 as authorized.

3. **REPORT TITLE:** Enter the complete report title in all capital letters. Titles in all cases should be unclassified. If a meaningful title cannot be selected without classification, show title classification in all capitals in parenthesis immediately following the title.

4. **DESCRIPTIVE NOTES:** If appropriate, enter the type of report, e.g., interim, progress, summary, annual, or final. Give the inclusive dates when a specific reporting period is covered.

5. **AUTHOR(S):** Enter the name(s) of author(s) as shown on or in the report. Enter last name, first name, middle initial. If military, show rank and branch of service. The name of the principal author is an absolute minimum requirement.

6. **REPORT DATE:** Enter the date of the report as day, month, year; or month, year. If more than one date appears on the report, use date of publication.

7a. **TOTAL NUMBER OF PAGES:** The total page count should follow normal pagination procedures, i.e., enter the number of pages containing information.

7b. **NUMBER OF REFERENCES:** Enter the total number of references cited in the report.

8a. **CONTRACT OR GRANT NUMBER:** If appropriate, enter the applicable number of the contract or grant under which the report was written.

8b, 8c, & 8d. **PROJECT NUMBER:** Enter the appropriate military department identification, such as project number, subproject number, system numbers, task number, etc.

9a. **ORIGINATOR'S REPORT NUMBER(S):** Enter the official report number by which the document will be identified and controlled by the originating activity. This number must be unique to this report.

9b. **OTHER REPORT NUMBER(S):** If the report has been assigned any other report numbers (*either by the originator or by the sponsor*), also enter this number(s).

10. **AVAILABILITY/LIMITATION NOTICES:** Enter any limitations on further dissemination of the report, other than those

imposed by security classification, using standard statements such as:

- (1) "Qualified requesters may obtain copies of this report from DDC."
- (2) "Foreign announcement and dissemination of this report by DDC is not authorized."
- (3) "U. S. Government agencies may obtain copies of this report directly from DDC. Other qualified DDC users shall request through \_\_\_\_\_."
- (4) "U. S. military agencies may obtain copies of this report directly from DDC. Other qualified users shall request through \_\_\_\_\_."
- (5) "All distribution of this report is controlled. Qualified DDC users shall request through \_\_\_\_\_."

If the report has been furnished to the Office of Technical Services, Department of Commerce, for sale to the public, indicate this fact and enter the price, if known.

11. **SUPPLEMENTARY NOTES:** Use for additional explanatory notes.

12. **SPONSORING MILITARY ACTIVITY:** Enter the name of the departmental project office or laboratory sponsoring (*paying for*) the research and development. Include address.

13. **ABSTRACT:** Enter an abstract giving a brief and factual summary of the document indicative of the report, even though it may also appear elsewhere in the body of the technical report. If additional space is required, a continuation sheet shall be attached.

It is highly desirable that the abstract of classified reports be unclassified. Each paragraph of the abstract shall end with an indication of the military security classification of the information in the paragraph, represented as (TS), (S), (C), or (U).

There is no limitation on the length of the abstract. However, the suggested length is from 150 to 225 words.

14. **KEY WORDS:** Key words are technically meaningful terms or short phrases that characterize a report and may be used as index entries for cataloging the report. Key words must be selected so that no security classification is required. Identifiers, such as equipment model designation, trade name, military project code name, geographic location, may be used as key words but will be followed by an indication of technical context. The assignment of links, roles, and weights is optional.